


REST API Kickstart (Documentation)

9. Replace the VALUE with the current token you just copied.

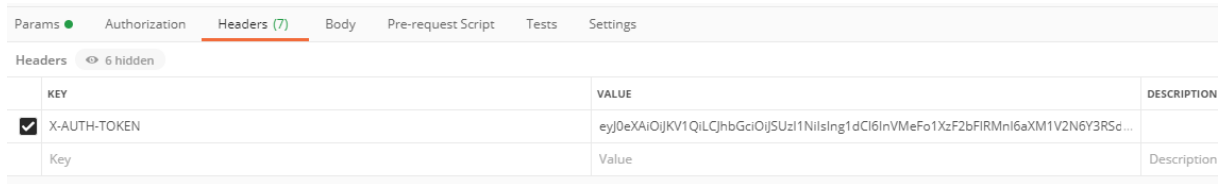

The screenshot shows the 'Headers' tab of an API client. The 'X-AUTH-TOKEN' header is selected, and its value is visible in the 'VALUE' column. The 'DESCRIPTION' column is empty for this header. Below the table, there are labels for 'Key' and 'Value'.

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> X-AUTH-TOKEN	eyJ0eXAiOiJKV1QiLCJhbGciOiJSUzI1NiIsIng1dCI6InVMFo1XzF2bFIRMnl6aXM1V2N6Y3RSd...	
Key	Value	Description

10. You can now go to the "Params" tab (the first tab in the image above), and change the date according to your requirements, you can leave it as it is to see the trades completed on 18th August 2020.